

S310D

DOUBLE STRAIGHT LOADER



The S310D Double Straight Loader is the entry level of the Freeway stable, though you wouldn't think so with the number of features packed in for the price.

The S310D is a very popular model in the Freeway double straight loader range. The S310D is a model for horse owners wanting basic facilities and comfortable transport for their horses. The 1100mm from chestbar to front, allows for a saddle cabinet unit, designed for the day-tripper in mind.





CUSTOM BUILT IN NZ TO YOUR REQUIREMENTS

0800 FREEWAY | sales@freewaytrailers.co.nz | freewaytrailers.co.nz



S310D

DOUBLE STRAIGHT LOADER

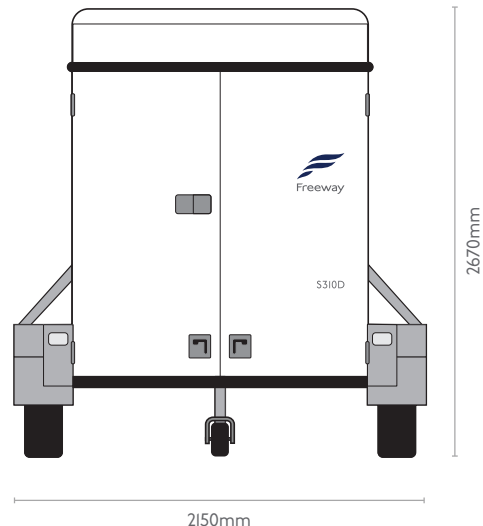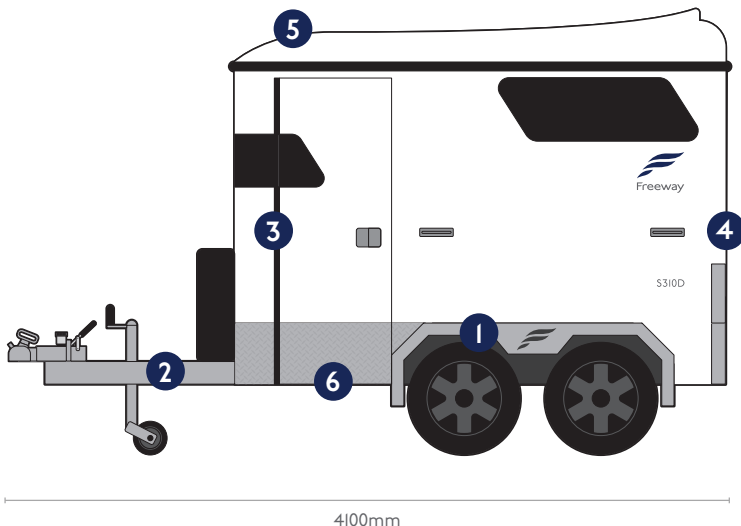

FREEWAY TOW-OLOGY™

THE TECHNOLOGY BEHIND FREEWAY INNOVATIONS

- | | |
|--|--|
| 1 PRO-BALANCE™
Super smooth tow/ride suspension | 4 PRO-LOADER™
Spring loaded slam lock rump doors |
| 2 DOUBLE-DIP GALVANISED CHASSIS
Super strong chassis - BUILT TO LAST | 5 HORSE WHISPERA™
Aerodynamically designed body and roof |
| 3 CUSTOMISATION
Your Freeway, your way | 6 FREEWAY 10-YEAR
Worldwide chassis warranty |

FEATURES

- Freeway 10 year chassis warranty
- Freeway Double-dip galvanised NZ High Grade AS/NZS 1163 steel chassis
- Freeway Pro-Balance™ load share suspension system
- Fully welded joints from chassis to upper frame, no mechanical fixings
- Freeway Pro-Loader™ spring loaded, quick release, slam lock rump doors
- Freeway Horse Whispera™ aerodynamically designed body and roof
- Galvanised and professionally painted upper frame for added durability
- Colorsteel® MAXX® outer cladding
- Removable, padded swinging divider
- Solid fibreglass moulded roof
- Tandem axle
- Non-slip pimple grip rubber flooring glued/sealed to galvanised NZ steel horse area subfloor
- Tough, tinted anti-glare front perspex window
- Durable high density polyethylene internal side kick plates
- Hard wearing hydraulic disc braking system
- Duo-fit coupling - fits 50mm and 1 7/8" ball sizes
- Heavy duty jockey wheel
- External LED indicator/stop lights
- Powered through 7 pin trailer plug
- Full height lockable side entry door
- Centre adjustable roof ventilation
- 400mm high alloy stone guard skirt
- Warrant of Fitness
- Optional extras pricelist on request
- *Note: Images may include optional extras*

SPECIFICATIONS

Box length	3100mm
Box width	1600mm
Subframe RHS thickness	4mm
Upper frame SHS thickness	2mm
Colorsteel® MAXX® cladding thickness	0.55mm
Chest bar to centre of curved front	1100mm
Horse bay width	740mm
Horse bay length	1900mm
Internal height in storage area	2200mm
Internal height of horse bay	2300mm
Overall width	2150mm
Drawbar length	1000mm
Step up height to horse bay	300mm
Approx. tow weight unladen	950kg
GVM	2500kg
Number of horses	2
Length overall	4100mm

CUSTOM BUILT IN NZ TO YOUR REQUIREMENTS

0800 FREEWAY | sales@freewaytrailers.co.nz | freewaytrailers.co.nz

